



ECO LINE

Wall axial fans
Wall and ceiling installation



ECO GF
FIXED GRILLE



ECO GG
GRAVITY SHUTTER



ECO A
AUTOMATIC



Complies with ErP Directive 2009/125/CE
and EU Regulation 1253/2014
Classification: Residential Ventilation Unit

- To exhaust air directly to the outside or into a short length ducting (max 3 m length).
- Suitable for toilets, bathrooms, WC's, shower-rooms, utility rooms and kitchens.
- Wide range of models all suitable for wall, window and ceiling installation.
- Low energy consumption and high performance for a quick and efficient extraction of stale air.



PERFORMANCE

MODELS	m³/h	ls	Pa	W	dB (A)*
ECO 100	90	25	26	11	39
ECO 120	170	47	39	15	42
ECO 150	320	89	69	25	49

* LpA measured at 3 m in open field 230v - 50Hz.

VERSIONS



BASE - On/off through light or remote control switch



TIMER - Integral electronic timer adjustable from 3 to 25 minutes




MHT - Humidity control, adjustable from 40 to 80% of R.H. and Timer adjustable from 3 to 25 mm




2V - 24 hours running at the lowest speed

DIMENSIONS (mm)


MODELS	A	B	C	D	E	Kg.
ECO 100 GF	155	155	92	35	97	0,5
ECO 120 GF	180	180	121	51	119	0,8
ECO 150 GF	209	209	137	52	149	1,2
ECO 100 GG	155	155	92	35	97	0,5
ECO 120 GG	180	180	121	51	119	0,8
ECO 150 GG	209	209	137	52	149	1,2
ECO 100 A	155	155	101	44	97	0,6
ECO 120 A	180	180	121	51	119	0,8
ECO 150 A	209	209	137	52	149	1,2

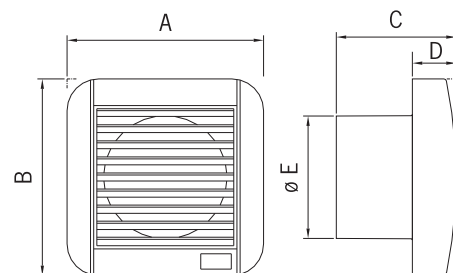

INSTALLATION

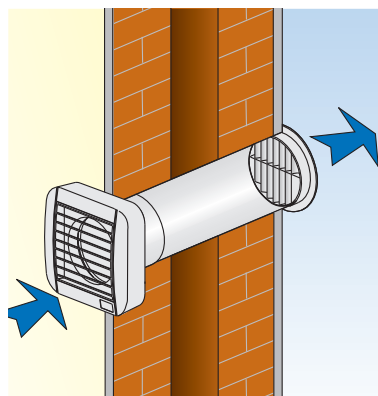

WALL

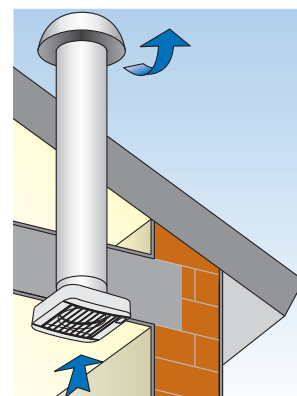

CEILING





ECO LINE

Wall axial fans
Wall and ceiling installation



CURVES

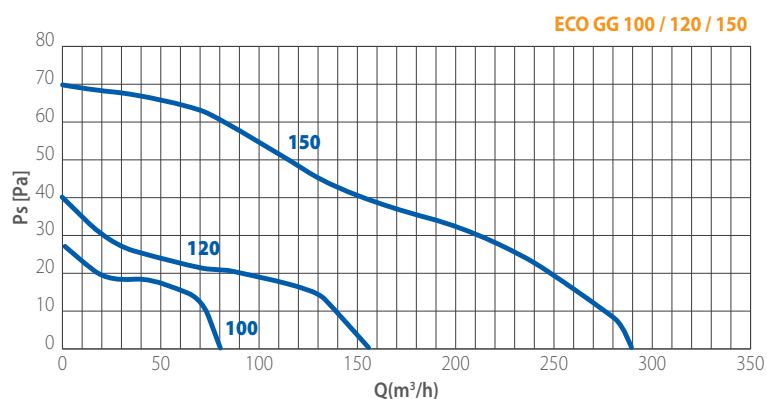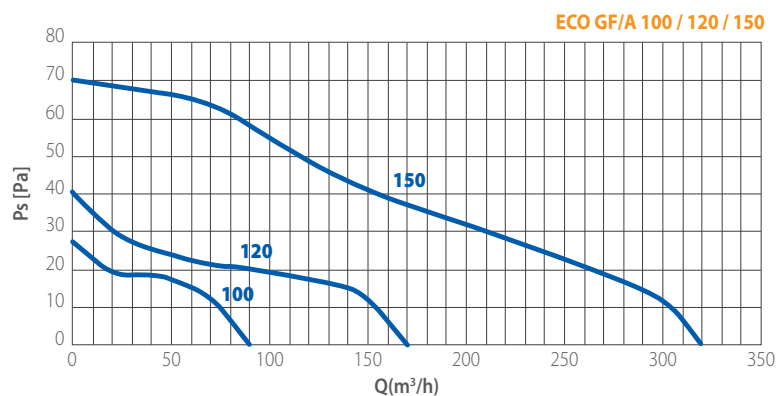

WINDOW KIT



WINDOW KIT GG (gravity shutter)

Suitable for ECOLINE GF

MODEL
WINDOW KIT GG 100
WINDOW KIT GG 120
WINDOW KIT GG 150




WINDOW KIT GF (grille fixed)

*Suitable for
ECOLINE GG and A*

MODEL
WINDOW KIT GF 100
WINDOW KIT GF 120
WINDOW KIT GF 150

DIMENSIONS (mm)



MODEL	A	B	C	Ø glass hole
WINDOW KIT 100	157	157	66	150
WINDOW KIT 120	178	178	82	175
WINDOW KIT 150	208	208	95	175